

D5BT-2800/3800-1-O/O-GRI — Digitally Controlled Tunable Filter

◆ Features:

- Designed for Lab Use and Test Applications
- Passbands up to 2% of the Tuned Center Frequency
- Tuning Range can be Extended from 2800-3800 to 2000-4000 MHz
- Manual and Digitally Controlled Versions Available
- Digital Control Options include GPIB, RS-232, RS-422 and BCD
- Optional Control Voltages Include 24 or 12 VDC and 110/220 VAC




◆ Specifications:

Tuning Range: 2800 to 3800 Mhz *
 3 db Bandwidth: 1% of the Tuned Center Frequency*
 Insertion Loss: 3 dB max at the Tuned Center Frequency
 Size: 9.75"L x 3"W x 3.2"H**
 Control Voltage: 24 VDC*


VSWR: 1.5:1
 Digital Interface: GPIB*
 30 dB:3 dB Shape Factor: 2.2:1
 3 dB:50 dB Shape Factor: 3.5:1
 Connectors: SMA Female*

*Other options are available. Please see above or contact K&L Microwave.

**Size does not include connectors or feet.

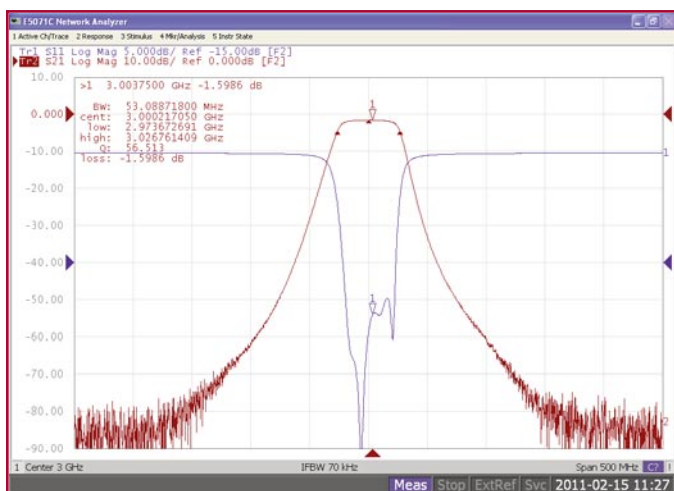

3 GHz

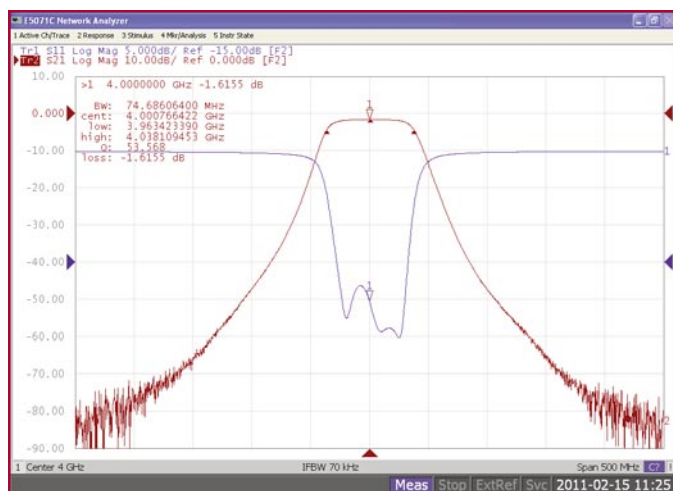

4 GHz

www.klmicrowave.com
 Phone: 410-749-2424 • FAX: 443-260-2268
 Email: sales@klmicrowave.com



www.klfilterwizard.com
 2250 Northwood Drive
 Salisbury, MD 21804